

# New from Crosby...

## Grade 100 Chain Hooks



L-1338  
Cradle Grab  
Hook with Latch

A-1359  
Clevis Foundry  
Hook




**Fatigue Rated Crosby 8/10™**

- ✓ Forged Alloy Steel - Quenched and Tempered.
- ✓ Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- ✓ Each hook has a Product Identification Code (PIC) for material traceability, along with the size and the name Crosby & U.S.A. in raised letters.
- ✓ Suitable for use with Grade 100 chain in overhead lifting applications as long as hook is Proof Tested as part of the chain sling assembly or as an individual component. Per ANSI B30.9-1.
- ✓ Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- ✓ "Look for the Platinum Color - Crosby Grade 100 Alloy Products."

The use of L-1338 Cradle Grab Hook will allow 100% of the chain sling capacity. When used to hook back to chain leg to form a choker, the angle of the choke must be 120° or greater. When used as a chain shortener, minimize twist of chain and ensure chain is fully engaged in hook.

Chain Size		Working Load Limit (t)*	L-1338 Stock No.	Weight Each (kg)	Dimensions (mm)						S4338 Replacement Latch Kit Stock No.
(in.)	(mm)				A	B	C	D	E	F	
1/4	7	2.0	1049480	.20	43.7	64.5	55.9	98.5	38.1	22.4	1048426
5/16	8	2.6	1049489	.45	43.7	64.5	55.4	98.5	38.1	22.4	1048426
3/8	10	4.0	1049498	.82	47.0	78.5	65.5	119	46.5	27.7	1048435
1/2	13	6.8	1049507	1.78	60.7	97.3	83.3	149	57.2	36.1	1048444
5/8	16	10.3	1049516	3.18	67.8	115	97.8	179	74.7	44.5	1048453

\*Ultimate Load is 4 times the Working Load Limit.

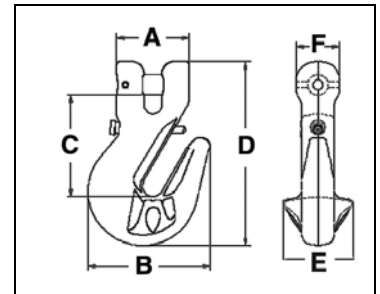


L-1338

A-1359 Foundry hook incorporates strategically placed markings into the product which address the Crosby **QUIC-CHECK®** feature of deformation indicators.



Chain Size		Working Load Limit (t)*	A-1359 Stock No.	Weight Each (kg)	Dimensions (mm)							
(in.)	(mm)				A	C	D	F	G	K	N	AA
1/4	7	2.0	1049907	0.95	159	112	122	63.5	28.7	22.4	39.9	88.9
5/16	8	2.6	1049911	0.95	159	111	122	63.5	28.7	22.4	39.9	88.9
3/8	10	4.0	1049916	1.95	197	141	148	76.2	35.1	33.0	47.8	102
1/2	13	6.8	1049925	3.60	238	169	179	88.9	41.4	38.1	57.2	114
5/8	16	10.3	1049934	6.44	286	195	208	102	55.6	44.5	64.3	127
3/4	18-20	16.0	1049943	11.2	367	249	245	127	61.0	55.9	86.1	152
7/8	22-23	20.0	1049952	19.9	413	280	280	140	78.0	69.1	95.0	165

\*Ultimate Load is 4 times the Working Load Limit.

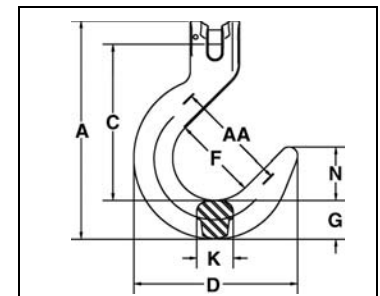

A-1359

# Crosby®

Europe

Crosby Europe N.V.  
Industriepark Zone B nr 26  
B-2220 Heist-op-den-Berg  
Belgium  
Tel: +32-15-75 71 25  
Fax: +32-15-75 37 64  
sales@crosbyeurope.com

Crosby Europe UK Ltd.  
Unit 10, Fall Bank Industrial Estate  
Dodworth / Barnsley  
South Yorkshire S75 3LS U.K.  
Tel: +44 1226 290 516  
Fax: +44 1226 240 118  
sales@crosbyeurope.co.uk

Crosby Europe France Sarl  
Parc d'affaires SILIC-Bât. Cérés-Porte 304  
21 rue du Petit Albi  
95800 Cergy-St. Christophe FRANCE  
Tel: +33 1 34 20 11 80  
Fax: +33 1 34 20 11 88  
sales@crosbyeurope.fr

CROSBY PRODUCTS DISTRIBUTED BY:

[www.thecrosbygroup.com](http://www.thecrosbygroup.com)