



NEW!

**MAINTAINS
FULL RATED
CAPACITY AT
ANGLES UP
TO 90°**

IPTKA universal beam clamp



The IPTKA universal beam clamp is the new standard for hoisting, pulling and positioning beams and can be used as a temporary tackle point.

Features & Benefits


- No interference or space limitations when tightening the clamp.
- Multi-purpose hoisting eye to be used for tightening as well as for hoisting.
- Light weight design.
- All parts are replaceable.
- Maintenance and repair kits are available.
- Can be used for a wide range of profile sizes.

- Maintains 100% WLL at angles up to 90°.
- Bail swivels 360° and pivots 180°.
- Easy to close and open with a hinged body with self-locking device.
- Integrated handgrips to ease handling.



IPTKA universal beam clamp

Maintains full rated capacity at angles up to 90°

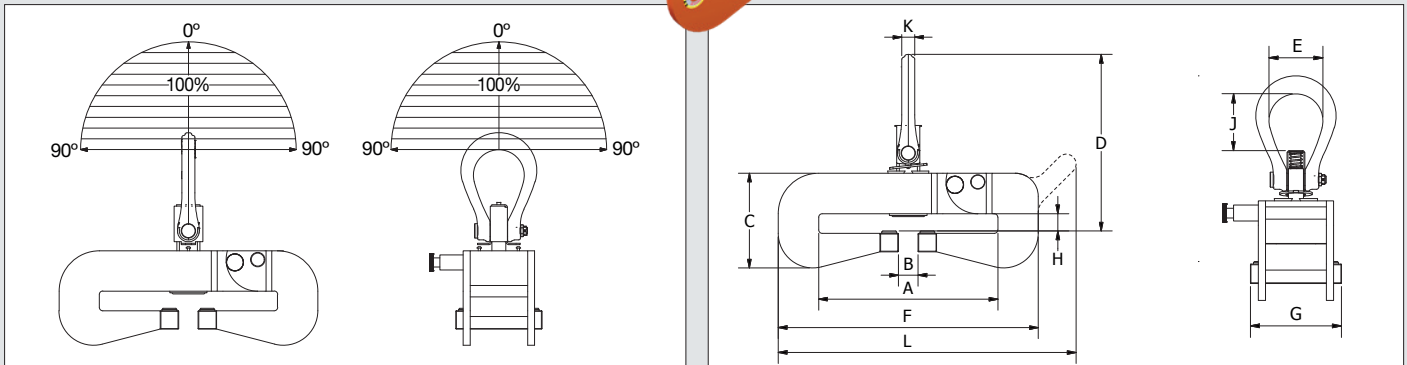

Metric				Dimensions (mm)										
Model	Stock No.	W.L.L. (t)	Weight (kg)	A	B	C	D	E	F	G	H	J	K	L
IPTKA	2707111	3	15.9	100-205	34	149	307	89	310	130	6-26	94	22	369
IPTKAJ1	2707116	3	14.2	70-125	24	134	297	89	257	130	6-26	94	22	315
IPTKAJ2	2707117	3	16	100-205	54	164	322	89	310	130	20-40	94	22	369
IPTKA	2707065	5	23.3	100-305	34	164	306	89	450	150	6-26	94	22	-
IPTKAJ1	2707114	5	16.9	70-125	24	139	296	89	267	150	6-26	94	22	336
IPTKAJ2	2707115	5	23.2	100-305	74	179	321	89	450	150	20-40	94	22	-

Imperial				Dimensions (in)										
Model	Stock No.	W.L.L. (t)	Weight (lbs)	A	B	C	D	E	F	G	H	J	K	L
IPTKA	2707111	3	35	3.9-8.1	1.34	5.87	12.09	3.5	12.2	5.12	0.24-1	3.7	0.87	14.53
IPTKAJ1	2707116	3	31.3	2.8-4.9	0.94	5.28	11.69	3.5	10.12	5.12	0.24-1	3.7	0.87	12.4
IPTKAJ2	2707117	3	35.3	3.9-8.1	2.13	6.46	12.68	3.5	12.2	5.12	0.8-1.57	3.7	0.87	14.53
IPTKA	2707065	5	51.4	3.9-12	1.34	6.46	12.05	3.5	17.72	5.91	0.24-1	3.7	0.87	-
IPTKAJ1	2707114	5	37.3	2.8-4.9	0.94	5.47	11.65	3.5	10.51	5.91	0.24-1	3.7	0.87	13.23
IPTKAJ2	2707115	5	51.2	3.9-12	2.91	7.05	12.64	3.5	17.72	5.91	0.8-1.57	3.7	0.87	-

Our other beam clamps

For transferring steel beams and attaching tackle eye.



IPTK



IPTKW



IPTKU



IPTKUM

- General purpose beam clamp for transferring and attaching tackle eye, with and without hoisting eye.
- Available in capacities of 2 thru 25 metric tons.
- Wide variety of jaw openings available: available: 75 mm to 1020 mm - 2.95 in to 40 in.

- For transferring steel beams and attaching tackle eye.
- **IPTKU**: with hinged hoisting eye / **IPTKUD**: with double locking device
- Available in capacities of 2 thru 10 metric tons.
- Wide variety of jaw openings available: 75 mm to 460 mm - 2.95 in to 18.11 in.

Industries



Ship yards: erecting, lifting and placing ship sections.



Offshore: temporary tackle point.



Construction industry: erecting and hoisting beams.



Bridge building: bridge constructions.



General Steel construction: lifting structural members.

Crosby ^{ip}
LIFTING CLAMPS