



Crosby® Grade 100 SHUR-LOC® Handle Hooks



S-13326AH
SHUR-LOC® Handle Swivel Hook with Bearing

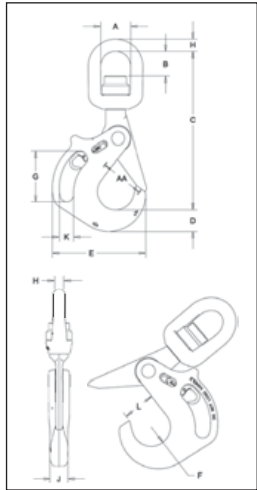

S-1316AH
SHUR-LOC® Handle Eye Hook

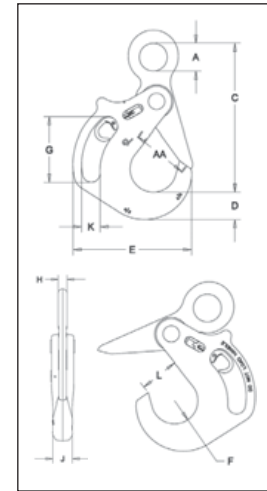

- The SHUR-LOC® Handle Hook allows the user to get a confident grip on a load with ease and comfort.
- Designed with a handle opening big enough to comfortably fit a gloved hand.
- The replaceable pull-trigger allows the user to easily open the SHUR-LOC's positive self-locking latch.
 - Ergonomically designed for easy use and precise control.
 - Secondary side trigger is recessed to avoid inadvertent release.

All SHUR-LOC® hooks have the following features:

- Forged Alloy Steel - Quenched and Tempered.
- Positive Lock Latch is Self-Locking when hook is loaded.
- Individually Proof Tested at 2-1/2 times the Chain Working Load Limit with certification
- Rated for both Wire Rope and use with Grade 80/100 Chain.
- G-414 Heavy Thimble or G-411 Standard Thimble should be used with wire rope slings.
- S-13326 Swivel Hook utilizes anti-friction bearing design which allows hook to rotate freely under load.
- Fatigue rated.
- "Look for the Platinum Color – Crosby Grade 100 Alloy Products."
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Each SHUR-LOC® handle hook has a serial number.



S-13326AH SHUR-LOC® Handle Swivel Hooks with Bearings

Chain Size		Grade 100 Alloy Chain Working Load Limit (lb) 4:1*	Working Load Limit (lb) 5:1*	Frame Code	Stock No.	Weight Each (lb)	Dimensions (in)											
(in)	(mm)						A	B	C	D	E	F	G	H	J	K	L	AA**
5/8	16	22,600	18,080	JA	1005014	26	2.75	2.25	10.69	1.97	8.54	1.67	4.69	1.13	1.73	1.32	2.80	4.00
3/4	18/20	35,300	28,240	KA	1005023	37	3.12	2.04	15.49	2.60	10.03	1.99	4.72	1.25	2.05	1.26	3.31	5.00
7/8	22	42,700	34,160	LA	1005041	57	4.09	3.65	18.98	2.72	11.48	2.24	5.35	1.63	2.44	1.57	3.66	6.00
1	26	59,700	47,760	NA	1005050	84	5.00	4.02	21.55	3.11	12.77	2.52	6.46	1.63	2.76	1.57	4.09	6.50

*Ultimate Load is 4 times the Working Load Limit. ** Deformation Indicators.

S-1316AH SHUR-LOC® Handle Eye Hook

Chain Size		Grade 100 Alloy Chain Working Load Limit (lb) 4:1*	Working Load Limit (lb) 5:1*	Frame Code	Stock No.	Weight Each (lb)	Dimensions (in)											
(in)	(mm)						A	B	C	D	E	F	G	H	J	K	L	AA**
5/8	16	22,600	18,080	JA	1023579	18	2.01	10.69	1.97	8.54	1.67	4.69	0.79	1.73	2.80	4.00	2.80	4.00
3/4	18/20	35,300	28,240	KA	1023599	28	2.76	12.03	2.60	10.03	1.99	4.72	0.87	2.05	3.31	5.00	3.31	5.00
7/8	22	42,700	34,160	LA	1023607	39	3.15	13.46	2.72	11.48	2.24	5.35	3.58	2.44	3.66	6.00	3.66	6.00
1	26	59,700	47,760	NA	1023625	60	3.54	15.55	3.11	12.77	2.52	6.46	1.18	2.76	4.09	6.50	4.09	6.50

*Ultimate Load is 4 times the Working Load Limit. ** Deformation Indicators.