




A-1342N
Master Link

- Alloy Steel - Quenched and Tempered.
- Individually proof tested to values shown with certification
- Proof tested with fixture sized to prevent localized point loading per ASTM A952.
- Proof test certification shipped with each link.
- All sizes are forged unless otherwise specified
- “Look for the Platinum Color - Crosby Grade 100 Alloy Products.”
- Engineered Flat for use with S-1325A coupler link.



A-1342N Master Link

| A-1342N Designation Marking | A-1342N Stock No. | Grade 100 Chain Size | | Working Load Limit (lb)* | Proof Load (lb) | Weight Each (lb) | Dimensions (in) | | |
|-----------------------------|-------------------|----------------------|-------|--------------------------|-----------------|------------------|-----------------|------|-------|
| | | (in) | (mm) | | | | A | B | C |
| X 1 | 1011403 | 1/4 | 6 - 7 | 8600 | 17200 | 1.1 | .60 | 2.50 | 5.00 |
| X 2 | 1011412 | 5/16 | 8 | 11400 | 22800 | 1.7 | .70 | 2.75 | 5.50 |
| X 3 | 1011421 | 3/8 | 10 | 17600 | 35200 | 2.5 | .81 | 3.00 | 6.00 |
| X 4 | 1011430 | 1/2 | 13 | 30000 | 60000 | 6.2 | 1.09 | 4.00 | 8.00 |
| X 5 | 1011449 | 5/8 | 16 | 45200 | 90400 | 10.6 | 1.34 | 5.00 | 9.00 |
| X 6 | 1011458** | 3/4 | 19 | 70600 | 141200 | 18.8 | 1.63 | 5.25 | 10.50 |
| X 7 | 1011467** | 7/8 | 22 | 85400 | 170800 | 28.8 | 1.88 | 6.00 | 12.00 |


* Minimum Ultimate Load is 4 times the Working Load Limit.

** Welded.



A-1345N
Master Link Assembly

- Alloy Steel - Quenched and Tempered.
- Individually proof tested to values shown with certification
- Proof tested with fixture sized to prevent localized point loading per ASTM A952.
- Proof test certification shipped with each link.
- “Look for the Platinum Color - Crosby Grade 100 Alloy Products.”
- Engineered Flat for use with S-1325A coupler link.

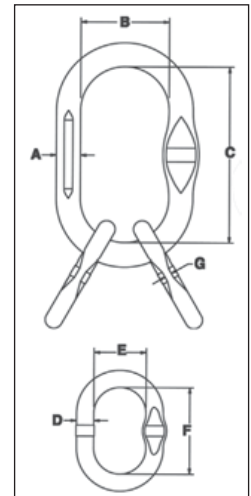

A-1345N Master Link Assembly

| A-1345N Designation Marking | A-1345N Stock No. | Grade 100 Chain Size | | Working Load Limit (lb)* | Proof Load (lb) | Weight Each (lb) | Dimensions (in) | | | | | | |
|-----------------------------|-------------------|----------------------|-------|--------------------------|-----------------|------------------|-----------------|------|-------|------|------|-------|-----|
| | | (in) | (mm) | | | | A | B | C | D | E | F | G |
| X 2 | 1011501 | - | 6 | 9600 | 19200 | 2.3 | .70 | 2.75 | 5.50 | .50 | 1.57 | 3.35 | .24 |
| X 3 | 1011510 | 1/4-5/16 | 7 - 8 | 17100 | 34200 | 4.2 | .84 | 3.00 | 6.00 | .56 | 1.77 | 3.35 | .30 |
| X 4 | 1011529 | 3/8 | 10 | 26400 | 52800 | 9.4 | 1.09 | 4.00 | 8.00 | .75 | 2.36 | 3.94 | .33 |
| X 5 | 1011538 | 1/2 | 13 | 45000 | 90000 | 19 | 1.34 | 5.00 | 9.00 | 1.00 | 3.00 | 6.30 | .51 |
| X 6 | 1011547 | 5/8 | 16 | 67800 | 135600 | 35 | 1.65 | 5.25 | 10.50 | 1.25 | 3.94 | 7.09 | .65 |
| X 7 | 1011556 | 3/4 | 19 | 105900 | 211800 | 54.2 | 1.88 | 6.00 | 12.00 | 1.50 | 4.25 | 8.00 | .81 |
| X 8 | 1011565 | 7/8 | 22 | 128100 | 256200 | 112 | 2.25 | 8.00 | 16.00 | 1.88 | 6.00 | 12.00 | .88 |

* Minimum Ultimate Load is 4 times the Working Load Limit.