


## Midgrab Chain Shortener, MIG

- Instant mounting and positioning on any part of the chain.
- Shortening in either chain direction; up-down.
- Designed to prevent inadvertent chain disengagement.
- Can be set idle on the chain leg when shortening is not required.
- LC version offers secure mounting with locking set on any desired part of the chain with one chain direction open for shortening.
- CC version offers close-open function in both chain directions for safe retention of the chain.

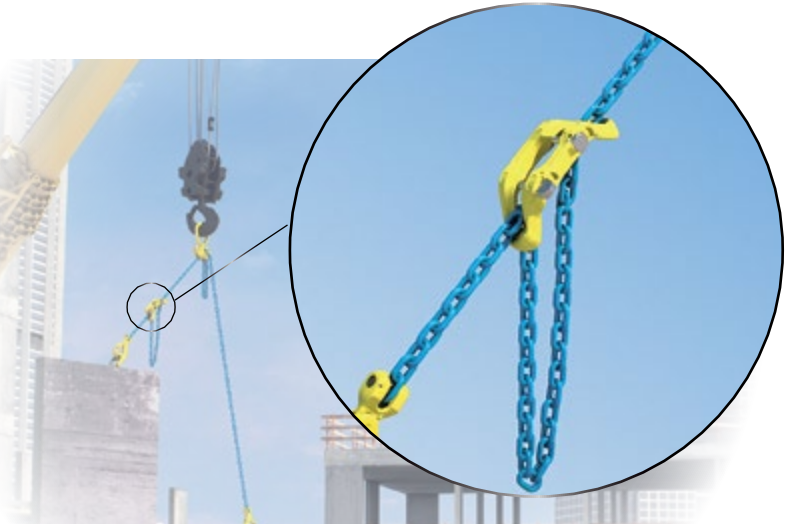

6

### Locking devices for Midgrab MIG

Note: The MIG should be used with at least one locking devices.

#### L - fixed locking set

For fixed mounting

Code:

- L-8: B14905
- L-10: B14915
- L-13: B14917




#### C - close/open locking set

Spring operated locking device. Can be placed either in open or closed position.

Code:

- C-8: B14904
- C-10: B14914
- C-13: B14916

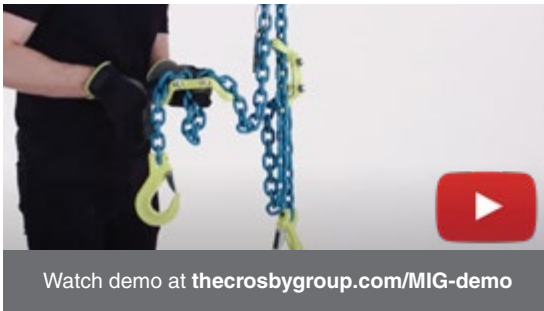

### Product code guide – locking options



### MIG with C pins

For use with Grade 100 or Grade 80 chain.

Stock No.	Code	WLL (lb)	L	X	Y	Weight (lb)
B14303	MIG CC-8-10	5700	3.74	1.97	2.36	1.54
B14313	MIG CC-10-10	8800	4.92	2.76	3.03	2.42
B14323	MIG CC-13-10	15000	5.91	3.54	3.15	5.73

4:1 Design Factor

### MIG without pins

For use with Grade 100 or Grade 80 chain.

Stock No.	Code	WLL (lb)	L	X	Y	Weight (lb)
B14300	MIG-8-10	5700	3.74	1.97	2.36	1.32
B14310	MIG-10-10	8800	4.92	2.76	3.03	2.20
B14320	MIG-13-10	15000	5.91	3.54	3.15	5.51

4:1 Design Factor

