


Roller-Bearing Swivel, SKLI/SKLU

Electrically insulated, lubricated, sealed roller bearing swivel. Fully rotational even at maximum load. Tested to resist 1000 V. Suitable for protection of overhead cranes during welding operations on suspended loads.

The Gunnebo Industries SKLI is equipped with a heavy duty roller bearing, enabling high durability and safe use also under severe load. It also has heavy duty nylon insulation inside to decrease friction when in use. The SKLU is compatible with the entire Gunnebo Industries SK-range for versatile use.



Roller-bearing Swivel SKLI/SKLU

For use with Grade 80 chain.

Stock No.	Code	WLL (lb)	L	D	Weight (lb)
Z100316	SKLI-7/8-8	4500	2.95	1.89	1.54
Z100414	SKLI-10-8	7100	3.82	2.32	2.87
Z100415	SKLI-13-8	12000	4.72	2.95	6.17
Z100416	SKLI-16-8	18000	5.39	3.54	10.14
Z100417	SKLI-18/20-8	28300	159	104	16.09
RS16520	SKLU-22-8*	34200	160	109	20.28
RS16530	SKLU-26-8*	47700	207	135	40.34

4:1 Design Factor. Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

* Uninsulated

Load Pin and Locking Collar – SKA


For use with Grade 80 chain.

Stock No.	Code	Weight (lb)
Z700674	SKA-6-8	0.02
Z323624	SKA-7/8-8	0.04
Z318024	SKA-10-8	0.09
Z303822	SKA-13-8	0.18
Z303725	SKA-16-8	0.31
Z145048	SKA-18/20-8	0.57
Z133530	SKA-22-8	0.77
Z605407	SKA-26-8	1.39
Z650554	SKA-32-8	2.31

4:1 Design Factor.

Master Link SKG (closed)

For use with Grade 80 chain. F or use with SK system.

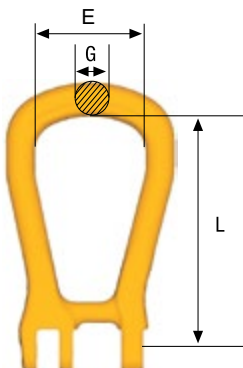

Stock No.	Code	WLL (lb)	L	E	G	Weight (lb)
Z419684	SKG-7/8-8	4500	3.90	1.97	0.55	0.66
Z419781	SKG-10-8	7100	5.00	2.60	0.71	1.32
Z419888	SKG-13-8	12000	5.71	2.83	0.87	2.43
Z419985	SKG-16-8	18000	6.89	3.23	0.98	3.31
Z420086	SKG-18/20-8	28300	8.03	4.13	1.18	6.61

4:1 Design Factor. Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

6