

Mid-Link Chain MLFZ, Grade 7

Heat treatment:
Quenched & Tempered


Surface treatment:
Hot-dip galvanized

Not for lifting purposes

Stock No.	Code	Link Dimensions			Min. Breaking Load (lb)	Weight lb / foot	Delivery Length
		d nom.	P	w1			
Z802455	MLFZ 10-6*	3/8"	1.57	0.57	22040	1.34	1 x 328 ft
Z802335	MLFZ-13-7	1/2"	2.17	0.80	39672	2.22	1 x 328 ft
Z801645	MLFZ-16-7	5/8"	2.56	0.81	61712	3.36	1 x 328 ft
Z801477	MLFZ-19-7	3/4"	2.95	1.14	88160	4.77	1 x 328 ft

Fulfills requirements in: EN 1461:2009 (Average surface thickness 3.35 mils)

* Average surface thickness 2.75 mils

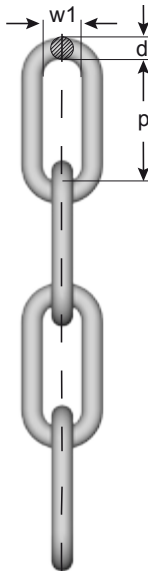

Long Link Chain LLZ, Grade 6

Heat treatment:
Quenched & Tempered

Surface treatment:
Hot-dip galvanized

Not for lifting purposes

Stock No.	Code	Link Dimensions			Min. Breaking Load (lb)	Weight lb / foot	Delivery Length
		d nom.	P	w1 min			
Z802453	LLZ-9-6*	6/16"	2.09	0.56	17191	0.94	1 x 328 ft
Z802454	LLZ-11-6*	7/16"	2.52	0.73	25566	1.41	4 x 328 ft
Z800682	LLZ-13-6	1/2"	3.15	0.83	35925	1.95	3 x 328 ft
Z802207	LLZ-13-6	1/2"	3.15	0.83	35925	1.95	1 x 750 ft
Z801567	LLZ-16-6	5/8"	3.94	1.06	54439	3.09	1 x 328 ft
GS1073	LLZ-16-6	5/8"	3.94	1.06	54439	3.09	1 x 656 ft
Z801458	LLZ-19-6	3/4"	3.94	1.12	76699	4.37	1 x 390 ft
Z801887	LLZ-22-6	7/8"	4.72	1.38	102706	5.85	1 x 164 ft
Z802447	LLZ-25-6	1"	5.51	1.46	132240	8.07	1 x 164 ft
Z802449	LLZ-28-6	1 1/8"	5.9	1.46	166008	14.9	1 x 164 ft
Z802451	LLZ-32-6	1 1/4"	6.69	1.73	216714	19.0	1 x 164 ft

Fulfills requirements in: EN 1461:2009 (Average surface thickness 3.35 mils)

* Average surface thickness 2.75 mils