


Peerless 8 Alloy Chain



- Finish – black paint.
- Permanently embossed with P (Peerless) and 8 (Grade).
- Proof Tested at minimum 2 times the Working Load Limit with certification.
- Meets the latest guidelines of the National Association of Chain Manufacturers (NACM) and ASTM A391/A391M for Grade 8 chain.

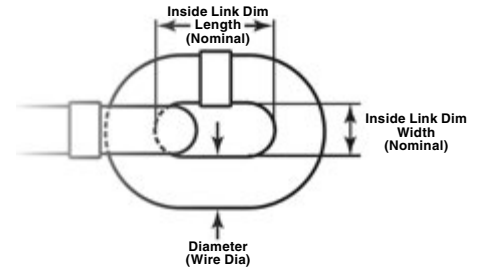

Grade 80 Alloy Chain Recommended for overhead lifting applications

Chain Size (in)	Chain Size (mm)	Stock No.	Feet Per Drum / Crate	Material Size (in)	Working Load Limit (lb)	Nominal Inside Length (in)	Nominal Inside Width (in)	Weight Per Foot (lb)
9/32 (1/4)	7	5050226	800	.279	3500	.87	.42	0.76
5/16	8	5050326	500	.311	4500	1.01	.49	0.98
3/8	10	5050426	500	.394	7100	1.23	.58	1.47
1/2	13	5050626	300	.516	12000	1.57	.75	2.55
5/8	16	5050826	200	.625	18100	1.96	.90	3.63
3/4	19/20	5050926	100	.781	28300	2.42	1.14	5.75
7/8	22	5051026	100	.906	34200	2.66	1.26	7.88
1	26	5051126	50	1.03	47700	2.89	1.42	10.98
1-1/4	32	5051226	66	1.26	72300	3.78	1.64	16.36

4:1 Design Factor.

6

Crosby provides two methods of attaching Spectrum 8® chain to Crosby fittings:

