





**G-2100**  
Release & Retrieve  
ROV Shackle with  
QUIC-Thread Bolt



**G-2110**  
Release & Retrieve  
ROV Shackle with  
Non - Thread Bolt



- Forged alloy bow with an industry best 6 to 1 performance design factor.
- Patented captured bolt can withstand over 2,000 lb (907 kg) of pull-out force.
- Galvanized bow with an API RP 17H color compliant coating.
- Galvanized alloy bolt (non-threaded) (G-2110).
- On average, QUIC-Thread bolt requires only 3.5 rotations for full engagement (G-2100).
- Raised pad for serialization.
- API RP 17H compliant 316 stainless steel handles available in T, D, F, and Eye models (sold separately).
- Built in eyelets for optional tether points.
- Monkey fist(s) included.
- Capacities from 9.5t through 85t.
- Forged steel, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- QUIC-CHECK® deformation and angle indicators forged on the bow.

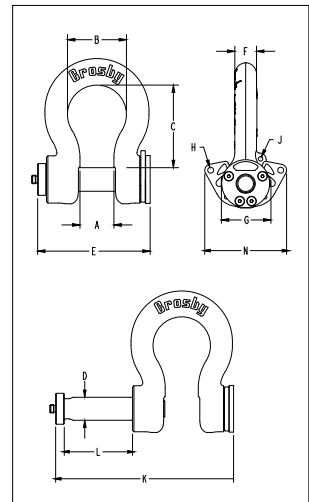

## G-2100 ROV Release & Retrieve Shackle — QUIC-Threaded

| Working Load Limit<br>(t)* | Stock<br>No. | Weight Each<br>(lb) | Dimensions (in) |      |       |      |       |      |      |      |      |       |      |      |  |
|----------------------------|--------------|---------------------|-----------------|------|-------|------|-------|------|------|------|------|-------|------|------|--|
|                            |              |                     | A               | B    | C     | D    | E     | F    | G    | H    | J    | K     | L    | N    |  |
| 9.5                        | 2038739      | 11.4                | 1.81            | 2.91 | 4.25  | 1.25 | 7.33  | 1.16 | 2.68 | 0.38 | 0.31 | 11.54 | 4.21 | 4.97 |  |
| 12                         | 2038762      | 13.8                | 2.03            | 3.25 | 4.69  | 1.38 | 7.75  | 1.29 | 3.00 | 0.38 | 0.31 | 12.25 | 4.50 | 4.97 |  |
| 17                         | 2038785      | 23.7                | 2.38            | 3.88 | 5.75  | 1.63 | 8.54  | 1.53 | 3.62 | 0.50 | 0.31 | 13.74 | 5.20 | 6.28 |  |
| 25                         | 2038614      | 38.6                | 2.88            | 5.00 | 7.00  | 2.00 | 9.54  | 1.84 | 4.20 | 0.50 | 0.38 | 15.48 | 5.94 | 6.94 |  |
| 35                         | 2038808      | 51.2                | 3.25            | 5.75 | 7.74  | 2.28 | 10.41 | 2.08 | 4.82 | 0.50 | 0.38 | 16.97 | 6.56 | 6.94 |  |
| 55                         | 2038831      | 108                 | 4.12            | 7.25 | 10.49 | 2.78 | 12.61 | 2.72 | 5.81 | 0.50 | 0.38 | 20.74 | 8.13 | 8.53 |  |
| 85                         | 2038877      | 157                 | 5.00            | 7.88 | 12.98 | 3.28 | 14.23 | 3.12 | 6.50 | 0.50 | 0.50 | 23.61 | 9.38 | 8.53 |  |

6:1 Design Factor. \*Note: Maximum Proof Loads are 2xWLL in metric tons.

## G-2110 ROV Release & Retrieve Shackle — Non-Threaded

| Working Load Limit<br>(t)* | Stock<br>No. | Weight Each<br>(lb) | Dimensions (in) |      |       |      |       |      |      |      |      |       |      |      |
|----------------------------|--------------|---------------------|-----------------|------|-------|------|-------|------|------|------|------|-------|------|------|
|                            |              |                     | A               | B    | C     | D    | E     | F    | G    | H    | J    | K     | L    | N    |
| 9.5                        | 2038740      | 11.4                | 1.81            | 2.91 | 4.25  | 1.25 | 7.33  | 1.16 | 2.68 | 0.38 | 0.31 | 11.54 | 4.21 | 4.97 |
| 12                         | 2038763      | 13.8                | 2.03            | 3.25 | 4.69  | 1.38 | 7.75  | 1.29 | 3.00 | 0.38 | 0.31 | 12.25 | 4.50 | 4.97 |
| 17                         | 2038786      | 23.7                | 2.38            | 3.88 | 5.75  | 1.63 | 8.54  | 1.53 | 3.62 | 0.50 | 0.31 | 13.74 | 5.20 | 6.28 |
| 25                         | 2038621      | 38.6                | 2.88            | 5.00 | 7.00  | 2.00 | 9.54  | 1.84 | 4.20 | 0.50 | 0.38 | 15.48 | 5.94 | 6.94 |
| 35                         | 2038809      | 51.2                | 3.25            | 5.75 | 7.74  | 2.28 | 10.41 | 2.08 | 4.82 | 0.50 | 0.38 | 16.97 | 6.56 | 6.94 |
| 55                         | 2038832      | 108                 | 4.12            | 7.25 | 10.49 | 2.78 | 12.61 | 2.72 | 5.81 | 0.50 | 0.38 | 20.74 | 8.13 | 8.53 |
| 85                         | 2038878      | 157                 | 5.00            | 7.88 | 12.98 | 3.28 | 14.23 | 3.12 | 6.50 | 0.50 | 0.50 | 23.61 | 9.38 | 8.53 |

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.

