


ROV Release Shackle No 863



- Equipped with bolt and two locking pins
- Dim. according to EN 13889
- High tensile steel, Quenched & Tempered
- All load bearing parts hot-dip galvanized
- 5:1 Design Factor
- Test certificate and traceable 3.1 certificate supplied on request.
- Temperature: -40 °F to 392 °F

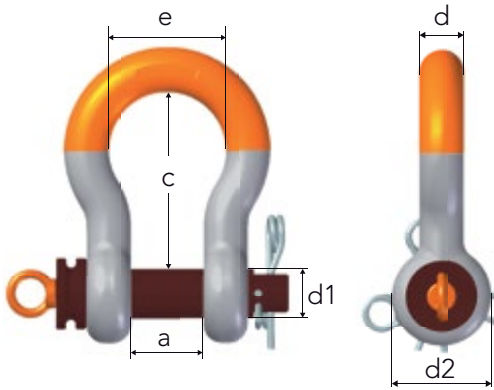


Stock No.	WLL metric tonnes	d1	d	a	c	d2	e	Weight (lb)
A086322	6.5	0.98	0.87	1.46	3.31	2.05	2.28	3.52
A086328	9.5	1.26	1.10	1.81	4.25	2.52	2.91	7.49
A086332	12.0	1.38	1.26	2.05	4.69	2.83	3.27	11.0
A086338	17.0	1.65	1.50	2.36	5.75	3.31	3.86	17.1
A086345	25.0	1.97	1.77	2.91	7.01	4.13	5.00	30.6
A086352	35.0	2.24	1.97	3.27	7.76	5.00	5.43	37.4
A086364	55.0	2.76	2.56	4.13	10.24	5.98	7.09	81.5

G-209R



- Capacities from 6-1/2t through 55t.
- Forged steel, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Fatigue rated.
- QUIC-CHECK® deformation and angle indicators forged on the bow.
- All ROV shackle bows are galvanized, then painted fluorescent yellow.
- Look for the Red Pin®... the mark of genuine Crosby quality.



G-209R Subsea Shackles

Working Load Limit (t)*	Stock No.	Weight Each (lb)	Dimensions (in)								
			A +/- .25	B	C	H	L	O	P	S	T
6.5	1020872	3.62	1.44	1.00	3.31	5.83	4.03	1.18	2.28	.65	.39
8.5	1020902	5.03	1.69	1.13	3.75	6.56	4.69	1.18	2.40	.73	.39
9.5	1020932	7.41	1.81	1.25	4.25	7.47	5.16	2.28	3.27	.75	.47
12	1020952	9.50	2.03	1.38	4.69	8.25	5.75	2.28	3.31	.89	.47
13.5	1020972	13.53	2.25	1.50	5.25	9.16	6.38	2.36	3.58	.91	.59
17	1020992	17.20	2.38	1.63	5.75	10.00	6.88	2.36	3.66	1.18	.59
25	1021102	27.78	2.88	2.00	7.00	12.34	8.86	2.16	4.49	1.14	.69
35	1021125	45.00	3.25	2.25	7.75	13.68	9.97	2.60	5.12	1.18	.79
55	1021158	85.75	4.13	2.75	10.50	17.84	12.87	2.76	5.63	1.50	.98

5:1 Design Factor. Maximum Proof Load is 2.0 times the Working Load Limit.

