


Master Link D



Stock No.	Code	WLL (lb)*	E	D	L	R	Weight (lb)
Z7008771	D-14-10	5510	2.17	0.55	2.56	0.94	0.88
Z7008781	D-17-10	8800	2.52	0.67	2.44	1.14	1.10
Z7008801	D-22-10	15428	2.99	0.87	3.54	1.30	2.20
Z7008791	D-27-10	22040	3.35	1.06	3.86	1.50	4.19
Z7008792	D-32-10	35300	4.49	1.26	5.47	1.97	7.72

The load bearing width must be at least 0.5 x E.




Weldable Lifting Point WLP



Stock No.	Code	WLL (lb)*	B	G	L	X	Weight (lb)
Z7009001	WLP-2.5T	5510	1.97	1.06	2.09	3.74	1.10
Z7009011	WLP-4T	8800	2.28	1.34	1.89	3.82	1.76
Z7009021	WLP-7T	15428	2.52	1.61	2.87	5.31	3.97
Z7009031	WLP-10T	22040	2.56	2.05	2.87	5.98	7.50
Z7009041	WLP-16T	35300	3.54	2.60	4.13	7.99	14.77

Supplied with spring for stay up function.
Master Link measurements, see Master Link D above.

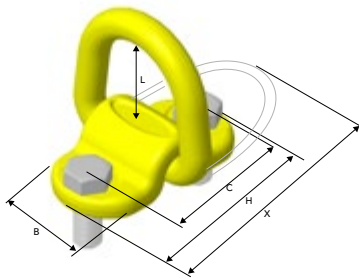


Screw-on Lifting Point SLP



Stock No.	Code	WLL (lb)*	B	C	H	L	M (metric thread)	X	Bolt Protrusion	Weight (lb)
Z7009881	SLP-1T	2204	1.97	2.83	3.86	2.13	M14	5.47	25	1.76
Z7009871	SLP-3T	6612	2.28	3.31	4.49	1.93	M16	5.67	28	2.87
Z7009861	SLP-5T	11020	2.52	4.57	6.30	2.80	M20	7.99	34	5.73

Supplied with bolt and spring for stay up function.
Bolt according to: ISO 898-1 Class 10.9.
Master Link measurements, see Master Link D above.

11



Eye Lifting Point ELP



Stock No.	Code	WLL		B	D	G	H	L	M	Weight (lb)
		metric tonnes*	(lb)							
Z100434	ELP-16-8	1.0**	2204	2.83	0.63	1.65	2.17	0.94	M16	0.88
Z100435	ELP-20-8	1.5**	3306	2.83	0.63	1.65	2.28	1.18	M20	0.88
Z100436	ELP-24-8	2.0**	4500	3.46	0.75	1.89	2.72	1.42	M24	1.98
Z100437	ELP-30-8	3.0**	6612	4.17	0.87	2.36	3.31	1.77	M30	3.09

** In case of 1-leg application where loading is limited to straight loading in the direction of thread (no bending force) it is possible to use ELP with four times higher WLL. Note! Threaded depths need to be at least 1xM for steel, 1.25xM for cast iron and 2xM for aluminum alloy.