


381-SY



- All single point shank hooks are genuine Crosby, forged alloy steel, Quenched & Tempered, and have the patented QUIC-CHECK® markings.
- Durable and allows longer continuous duty cycle.
- Can be used with magnet and drop ball.
- Single sheave design.
- Dual action hook that swings and rotates.
- Utilizes McKissick® roll-forged sheaves with flame-hardened grooves.
- Furnished standard with bronze bushed sheaves.
- Optional tapered roller bearings.
- Marked in short tons unless metric tag requested at time of order.

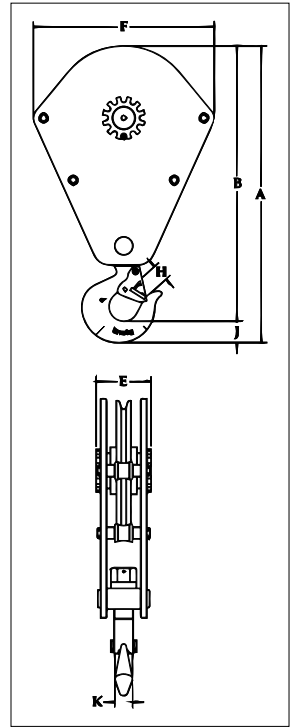

APPLICATION AND WARNING INFORMATION
SECTION 17

381-SY Scrap Handling Blocks

Model No.	Stock No.	Working Load Limit (short tons)	Sheave Diameter (in)	Standard Wire Rope Diameters (in)	Weight Each (lb)	Dimensions (in)						
						A	B	E	F	H	J	K
S15S16L	2014810	15	16	9/16, 5/8, 3/4, 7/8	285	37.16	34.19	6.34	22.75	2.75	2.97	2.38
S20S18L	2014812	20	18	5/8, 3/4, 7/8, 1	395	39.54	36.57	6.84	24.75	2.75	2.97	2.38
S25S20L	2014814	25	20	3/4, 7/8, 1, 1-1/8	460	42.16	39.19	6.84	26.75	2.75	2.97	2.38
S30S24L	2014816	30	24	7/8, 1, 1-1/8, 1-1/4	705	50.44	46.81	7.84	30.75	3.25	3.62	3.00
S40S24L	2014818	40	24	7/8, 1, 1-1/8, 1-1/4	815	55.81	50.75	7.84	30.75	3.38	5.06	3.25

4:1 Design Factor.