


Loadblock Plus



- The highest standard resolution of any self-indicating compression loadcell on the market today (5000+ divisions).
- Low capacity, self-indicating compression loadcell.
- Large 25mm or 1 in LCD display.
- 100Hz peak hold.
- Compact size.
- Push button tare.
- Preset tare.
- Peak hold.
- RS485 port for connection to data-logging system allowing remote viewing.
- Audible set-point alarm and an overload counter.
- Selectable units te, lbs, kN, kg.

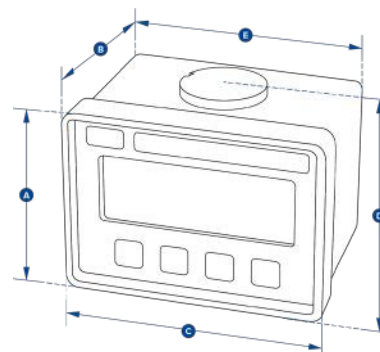

Part Numbers SP		LBP250KG	LBP500KG	LBP1T	LBP2T	LBP5T
Crosby		2789035	2789037	2789034	2789036	2789038
Capacity	(te)	250 kg	500 kg	1	2	5
	(lb)	550	1100	2200	4400	11000
Resolution	(te)	0.1 kg	0.2 kg	0.0005	0.001	0.001
	(lb)	0.2	0.5	1	2	2
Units	(metric)	metric tons, kilograms, kilonewtons and pounds				
	(imperial)	pounds, metric tons, kilonewtons and kilograms				
Weight	(kg)	0.9	0.9	0.9	1.5	3.1
	(lb)	2	2	2	3.3	6.8
Design Factor		4:1	5:1	5:1	5:1	5:1
Battery Type		9v PP3				
Battery Life		80 hours continuous				
Display Type		6 digit 25mm LCD or 6 digit 1" LCD				
Operating Temp.		-10°C to 50°C / 14°F to 122°F				
Accuracy		±0.1% of full scale				
Protection		IP65 / NEMA4X				
Dimension A (mm)		81	81	81	92	92
	(in)	3.19	3.19	3.19	3.62	3.62
Dimension B (mm)		81	81	81	117	136
	(in)	3.19	3.19	3.19	4.61	5.35
Dimension C (mm)		113	113	113	112	112
	(in)	4.45	4.45	4.45	4.41	4.41
Dimension D (mm)		90	90	90	104	115
	(in)	3.54	3.54	3.54	4.09	4.53
Dimension E (mm)		104	104	104	Not available in this capacity	
	(in)	4.09	4.09	4.09		