


A-345



- Alloy steel — Quenched & Tempered.
- Individually Proof Tested to values shown, with certification.
- Design Factor of 5 to 1
- Proof Tested with 60% inside width special fixtures sized to prevent localized point loading per ASME A-952.
- Each main link is marked with Product Identification Code (PIC) for material traceability, Grade, CE, chain size and the "CG" (Crosby Group). Each sublink is marked with traceability code.
- 22mm - 51mm A-345 master links are type approved to DNV Certification Notes 2.7-1- Offshore Containers. These Crosby master links are 100% proof tested, MPI and impact tested. The tests are conducted by Crosby and 3.1 test certification is available upon request.
- Engineered Flat for use with S-1325A coupler link.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these links meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.

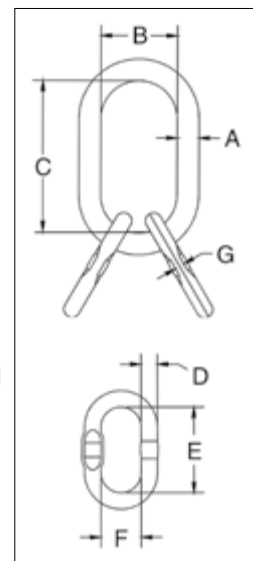

5

A-345 Master Link Assembly with Engineered Flat

Size		OC	Stock No.	Weight Each (kg)	Working Load Limit (t)	For Grade 100 Chain Size (mm)	For Grade 80 Chain Size (mm)	Proof Load (kN)	Dimensions (mm)								Engineered Flat for S-1325
(in)	(mm)								A	B	C	D	E	F	G	Deformation Indicator	
3/4W	19W	No	3685119	1.8	5.6	6, 7, 8	6, 7, 8	†137.3	19	82	152	13	120	60	6.2	102	6 - 8
7/8W	22W	Yes	3014742	3.2	6.9	8	10	†171.7	22	95	162	17	170	80	8.5	114	6 - 8
1W	26W	Yes	3014766	5.8	11.8	10	13	†289.4	28	109	191	22	160	95	10.6	140	10
1-1/4W	32W	Yes	3014779	12.1	17.7	13	16	†434.1	34	140	241	28	240	130	-	178	-
1-1/2W	38W	Yes	3014807	18.3	27.7	16	19	†679.3	41	150	267	32	270	130	-	191	-
1-3/4W	44	Yes	3014814	23.5	38.5	20	22	†944.2	44	152	305	36	270	125	-	191	-
2	51	Yes	3014832	33.5	46.5	22	26	†1140.4	51	178	356	40	270	140	-	229	-
2-1/2	64	No	3014855	62.2	72.6	26	32	†1780.5	64	213	406	50	308	190	-	279	-
2-3/4	70	No	3014864	84.5	98.4	32	32	†2413.3	70	251	457	55	355	200	-	318	-
3-1/4	83	No	1014986	116	106.5	32	-	2611.9	83	254	508	63	286	203	-	343	-
4	102	No	1014999	303	169	-	-	4144.7	102	306	610	89	610	305	-	394	-

5:1 Design Factor. The maximum individual sublink working load limit is 75% of the assembly working load limit. Sublink for 3.25" and 4" is 61% of the assembly working load limit. Applications with wire rope and synthetic sling generally require a design factor of 5. Proof Test Load equals or exceeds the requirement of ASTM A952(8.1) and ASME B30.9. Chain slings require that the Minimum Ultimate Load be 4 times the Working Load Limit. Refer to applications & warnings to determine products actual Ultimate Load. Proof Test Load equals or exceeds the requirement of ASTM A952(8.1) and ASME B30.9-1.4 for the chain size and number of legs. †Proof Tested to 2.5 times the Working Load Limit with 70 percent fixtures.

Fatigue Rated

Crosby 8/10™

QUIC-CHECK®

QT

APPLICATION AND WARNING INFORMATION
SECTION 17