

Identification of our Master Links

To provide good readability and traceability our master links have the following marking:

Product type

- M - represents single type master link.
- MT - represents master link assembly.
- OS - is an abbreviation for offshore. All Arctic offshore master links are marked with OS and complies with DNV 2.7-1.

Size designation

- The size is linked to the WLL as well as to compatible products, like attachment couplers and other components.
- Trade size.
- The size expressed in inch.

Approved by BG/DGUV

- H32 – represents Gunnebo Industries' manufacturing ID. The ID also represents a 3rd part audit by BG in Germany.

Traceability code

- The traceability code is unique for the production batch and normally consists of a letter and a number; for example A2. The traceability code makes it possible to trace and track the product through the whole production process back to the raw material used for the actual product.

Gunnebo Sweden


- To clearly highlight the Gunnebo Industries brand, our master links are marked with Gunnebo, Sweden.

Meets the standards

- The markings fulfills the requirements of EN 1677-4, ASTM A952, AS 3775.2 and DNV 2.7-1.



Master Link M

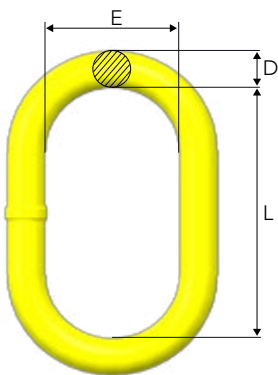

| Stock No. | Code | WLL (t) 5:1 | | Dimensions (mm) | | | Weight (kg) |
|-----------|------------|-------------|-------------------------------|-----------------|-----|----|-------------|
| | | EN 1677-4 | A-952/A952M AS 3775.2-2014 | L | E | D | |
| Z101271 | M-6-10 | 1.5 | 1.5 | 100 | 60 | 11 | 0.2 |
| Z100818 | M-86-10 | 2.5 | 3.2 | 2.36 | 60 | 13 | 0.4 |
| Z101273 | M-108-10 | 4.0 | 5.2 | 140 | 80 | 17 | 0.8 |
| Z101274 | M-13-10 | 6.8 | 6.8 | 160 | 90 | 19 | 1.0 |
| Z101267 | M-1310-10 | 7.5 | 8.0 | 160 | 95 | 22 | 1.5 |
| Z101268 | M-1613-10 | 10.0 | 13.6 | 190 | 110 | 28 | 2.8 |
| Z101247 | M-19-10 | 12.0 | 16.0 | 200 | 120 | 30 | 3.5 |
| Z101269 | M-2016-10 | 17.0 | 20.6 | 240 | 140 | 34 | 5.2 |
| Z101270 | M-2220-10 | 25.0 | 30.9 | 250 | 150 | 40 | 7.3 |
| Z101275 | M-2622-10 | 28.0 | 32.0 | 250 | 150 | 42 | 8.7 |
| Z101284 | M-32-10 | 33.0 | 38.6 | 340 | 180 | 45 | 12.9 |
| Z101276 | M-3226-10 | 43.0 | 46.6 | 300 | 200 | 50 | 14.8 |
| Z101277 | M-3632-10 | 56.0 | 65.0 | 350 | 200 | 55 | 20.7 |
| Z101278 | M-4536-10 | 70.0 | 72.7 | 375 | 210 | 60 | 26.4 |
| Z101279 | M-90T-10 | 90.0 | 100.0 | 450 | 250 | 70 | 42.8 |
| Z101280 | M-125T-10* | 125.0 | 125.0 | 450 | 260 | 80 | 57.0 |

* Dimension L and E not acc. to EN 1677-4.

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M, AS 3775:2014.

5:1 Design Factor