


Master Link MFX with engineered flat

Oversized, for 1- and 2-leg slings. Designed for use with CL, CLD, CG and CGD.




Stock No.	Code	WLL (t) 5:1		For chain size (mm)		Dimensions (mm)			Weight (kg)
		EN 1677-4	A-952/A952M AS 3775.2-2014	1-leg	2-leg	L	E	D	
Z100550	MFX-108-10	4.25	5.2	8, 10	8	340	180	25	3.7
Z100551	MFX-1310-10	7.5	8.0	13	10	340	180	28	4.7
Z100552	MFX-1613-10	11.2	13.6	16	13	340	180	34	7.1
Z101125	MFX-2016-10	16.0	20.6	20	16	340	180	40	9.6

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M-02, AS 3775:2014.
5:1 Design Factor

Master Link MF with engineered flat

Classic yellow paint.




Stock No.	Code	WLL (t)		Dimensions (mm)			Weight (kg)
		EN1677-4	A-952/A952M	L	E	D	
Z100817	MF-86-10	2.5	3.2	120	60	13	0.4
Z100861	MF-108-10	4.0	5.2	140	80	17	0.8
Z100862	MF-1310-10	7.5	8.0	160	95	22	1.5
Z100863	MF-1613-10	10.0	13.6	190	110	28	2.5
Z100864	MF-2016-10	17.0	20.6	240	140	34	5.2
Z100865	MF-2220-10	25.0	30.9	250	150	40	7.3

5:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

Master Link with Sub Links MT


Engineered flat on the sublinks. Classic yellow paint.

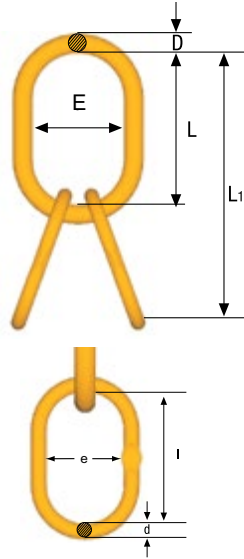

Stock No.	Code	WLL (t)		Dimensions (mm)								Weight (kg)
		EN1677-4	A-952/A952M	L1	L	E	D	l	e	d		
Z100819	MT-6-10	3.5	5.0	270	150	90	19	120	60	13	1.8	
Z100889	MT-8-10	5.2	8.0	300	160	95	22	140	80	17	3.0	
Z100890	MT-10-10	11.5	16.0	360	200	120	30	160	95	22	6.4	
Z100891	MT-13-10	17.0	26.0	440	250	150	40	190	110	28	14.2	
Z100892	MT-16-10	28.0	35.0	500	300	200	50	200	120	32	23	

5:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

Master Link MF HDG with engineered flat



Stock No.	Code	WLL (t)		Z100902			Weight (kg)
		EN1677-4	A-952/A952M	L	E	D	
BG14489	MF-86-8 HDG	2.0	2.5	120	60	13	0.5
BG14482	MF-108-8 HDG	3.2	4.0	140	80	17	0.8
BG14483	MF-1310-8 HDG	5.4	6.8	160	95	22	1.5
BG14484	MF-1613-8 HDG	8.2	10.3	190	110	28	2.8

5:1 Design Factor.