

Chain, GrabiQ Grade 10 (200) Short link, KL

Heat treatment:

Quenched & Tempered


Note: For chain Grade 10 (200) the maximum in service temperature is 200°C.

Surface treatment:

Painted blue

Fulfills the requirements in:

ASTM A973/A973M-07(2012)
EN 818-2:2008 (WLL +25%,
reduced temperature range)

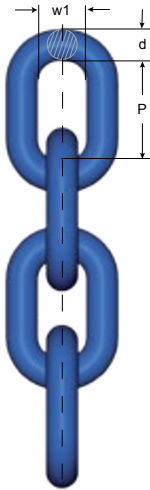

Stock No. Box	Code	WLL (t)	Dimensions (mm)			Weight kg / m	MPF kN	Breaking Force (kN)
			d nom.	P	w1			
Z802300 - 1 x 200 m	KLA 6-10 (200)	1.5	6	18	8.5	0.8	36.8	58.9
Z802337 - 1 x 200 m	KLA 7-10 (200)	1.95	7	21	10.0	1.1	48	77
Z802301 - 1 x 200 m	KLA 8-10 (200)	2.6	8	24	11.0	1.4	63	102
Z802302 - 1 x 100 m	KLA 10-10 (200)	4.0	10	30	14.0	2.3	98	158
Z802303 - 1 x 100 m	KLA 13-10 (200)	6.8	13	39	18.8	4.0	166	268
Z802304 - 1 x 100 m	KLA 16-10 (200)	10.3	16	48	21.9	5.6	251	402
Z802305 - 1 x 50 m	KLA 20-10 (200)	16.0	20	60	27.0	9.4	393	630
Z802246 - 1 x 50 m	KLA 22-10 (200)	20.0	22	66	29.0	11.9	491	785
Z802248 - 1 x 50 m	KLA 26-10 (200)	27.0	26	78	35.0	16.4	664	1062
Z802440 - 1 x 25 m	KLA 32-10 (200)	40.0	32	96	41.6	25.8	981	1610

4:1 Design Factor

Chain, GrabiQ Grade 10 (400) Short link, KL

Heat treatment:

Quenched & Tempered


Note: For chain Grade 10 (400) the maximum in service temperature is 400°C.

Surface treatment:

Painted blue

Fulfills the requirements in:

EN 818-2:2008 (WLL+25%,
material dimension Ø +10%)

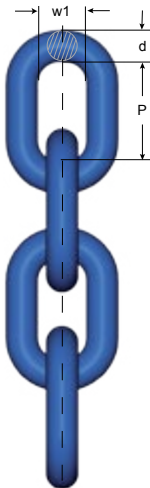

Stock No. Box	Code	WLL (t)	Dimensions (mm)			Weight kg / m	MPF kN	Breaking Force (kN)
			d nom.	P	w1			
Z802306 - 1 x 200 m	KLA 6-10 (400)	1.5	6.6	18	8.9	1.0	36.8	58.9
Z802307 - 1 x 200 m	KLA 8-10 (400)	2.5	8.8	24	11.2	1.7	63	102
Z802308 - 1 x 100 m	KLA 10-10 (400)	4.0	11.0	30	14.4	2.6	98	158
Z802309 - 1 x 100 m	KLA 13-10 (400)	6.7	14.3	39	19.2	4.5	166	268
Z802310 - 1 x 100 m	KLA 16-10 (400)	10.0	17.3	48	23.0	6.7	251	402

4:1 Design Factor

Chain, Classic Grade 8 Short link, KL

Heat treatment:

Quenched & Tempered

Surface treatment:

Painted black (KLB)
Painted yellow (KLU)

Fulfills the requirements in:

EN 818-2:2008, AS 2321:2014,
ASTM A391/A 391M-07 (2012)



Stock No. Box	Code	WLL (t)	Dimensions (mm)			Weight kg/m	Manufacturing Proof Force (kN)	Breaking Force (kN)
			d nom.	P	w1			
Z802174 - 1 x 200 m	KLB 6-8E	1.1	6	18	8.5	0.8	28.3	45.2
Z802175 - 1 x 200 m	KLB 7-8E	1.5	7	21	10.0	1.1	38.5	62
Z802176 - 1 x 200 m	KLB 8-8E	2.0	8	24	11.0	1.4	50.3	80.6
Z802156 - 1 x 100 m	KLB 10-8E	3.2	10	30	14.0	2.3	79	130
Z802157 - 1 x 100 m	KLB 13-8E	5.4	13	39	17.7	3.8	133	214
Z802177 - 1 x 100 m	KLB 16-8E	8.2	16	48	21.9	5.6	201	322
Z801203 - 1 x 100 m	KLB 19-8E	11.6	19	57	27.0	7.8	284	457
Z801228 - 1 x 50 m	KLB 22-8E	15.5	22	66	29.5	10.6	380	610
Z801231 - 1 x 50 m	KLB 26-8E	21.6	26	78	35.0	14.8	531	850
Z801232 - 1 x 25 m	KLB 32-8E	32.8	32	96	41.6	21.6	804	1300

4:1 Design Factor