

Mid-Link Chain MLFZ, Grade 7

Heat treatment:
Quenched & Tempered


Surface treatment:
Hot-dip galvanized

Not for lifting purposes

Stock No.	Code	Link Dimensions (mm)			Min. Breaking Load (ton)	Weight kg / m	Delivery Length
		d nom.	P	w1			
Z802455	MLFZ 10-6*	10	40	14.4	10	2.0	1 x 100 m
Z802335	MLFZ-13-7	13	55	20.2	18	3.3	1 x 100 m
Z801645	MLFZ-16-7	16	65	20.5	26.2	5.0	1 x 100 m
Z801477	MLFZ-19-7	19	75	29	37	7.1	1 x 100 m

Fulfills requirements in: EN 1461:2009 (Average surface thickness 85µm)

* Average surface thickness 70µm.

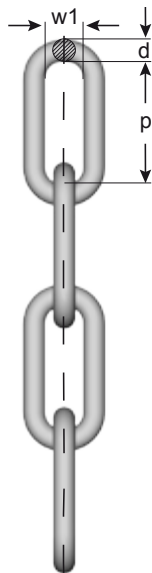

Long Link Chain LLZ, Grade 6

Heat treatment:
Quenched & Tempered

Surface treatment:
Hot-dip galvanized

Not for lifting purposes

Stock No.	Code	Link Dimensions (mm)			Min. Breaking Load (ton)	Weight kg / m	Delivery Length
		d nom.	P	w1 min			
Z802453	LLZ-9-6*	9	53	14.3	7.8	1.4	1 x 100 m
Z802454	LLZ-11-6*	11	64	18.5	11.6	2.1	4 x 100 m
Z800682	LLZ-13-6	13	80	21.1	16.3	2.9	3 x 100 m
Z802207	LLZ-13-6	13	80	21.1	16.3	2.9	1 x 229,5 m
Z801567	LLZ-16-6	16	100	27	24.7	4.6	1 x 100 m
GS1073	LLZ-16-6	16	100	27	24.7	4.6	1 x 200 m
Z801458	LLZ-19-6	19	100	28.5	34.8	6.5	1 x 120 m
Z801887	LLZ-22-6	22	120	36	46.6	8.7	1 x 50 m
Z802447	LLZ-25-6	25	140	37	60.0	12.0	1 x 50 m
Z802449	LLZ-28-6	28	150	39	75.3	14.9	1 x 50 m
Z802451	LLZ-32-6	32	170	44	98.3	19.0	1 x 50 m

Fulfills requirements in: EN 1461:2009 (Average surface thickness 85µm)

* Average surface thickness 70µm.