


Short Link Chain KLFU, Grade 8

Heat treatment:
Quenched & Tempered,
Stress relieved

Surface treatment:
Painted yellow

Not for lifting purposes

Stock No.	Code	Link Dimensions (mm)			Weight kg / m	Min. Breaking Load (t)	Delivery Length
		d nom.	P	w1			
Z802330	KLFU-10-8	10	30	14.0	2.2	12.6	1 x 100 m
Z802331	KLFU-13-8	13	39	17.6	3.7	21.4	1 x 100 m
Z801146	KLFU-16-8	16	48	21.5	5.8	32.2	1 x 100 m
Z327377	KLFU-19-8	19	57	27.0	8.0	45.4	1 x 100 m
Z327385	KLFU-22-8	22	66	30.0	11.0	61	1 x 50 m
Z801505	KLFU-26-8	26	78	35.0	14.8	86	1 x 50 m




Mid-Link Chain MLFU, Grade 8

Heat treatment:
Quenched & Tempered,
Stress relieved

Surface treatment:
Painted yellow

Not for lifting purposes

Stock No.	Code	Link Dimensions (mm)			Weight kg / m	Min. Breaking Load (t)	Delivery Length
		d nom.	P	w1			
Z802332	MLFU-10-8	10	40	14.4	2.0	12.6	1 x 100 m
Z802333	MLFU-13-8	13	55	20.2	3.3	21.4	1 x 100 m
Z800564	MLFU-16-8	16	65	20.5	5.0	32.2	1 x 100 m
Z800476	MLFU-19-8	19	75	29.0	7.1	45.4	1 x 100 m
Z800661	MLFU-22-8	22	88	30.0	9.4	61	1 x 50 m
Z801770	MFLU-26-8	26	91	34.0	13.9	86	1 x 50 m

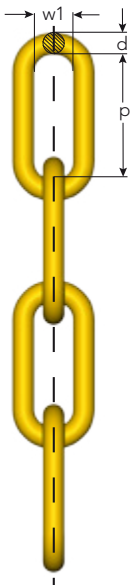

Long-Link Chain LLU, Grade 8

Heat treatment:
Quenched & Tempered,
Stress relieved

Surface treatment:
Painted yellow

Not for lifting purposes

Stock No.	Code	Link Dimensions (m)			Weight kg / m	Min. Breaking Load (t)	Delivery Length
		d	P	w1 min			
Z801934	LLU-9-8	9	53	14.3	1.4	10.2	4 x 100 m
Z801935	LLU-11-8	11	64	18.5	2.1	15.4	4 x 100 m
Z801936	LLU-13-8	13	80	21.1	2.9	21.4	3 x 100 m
Z802160	LLU-16-8	16	100	27.0	4.6	32.2	1 x 100 m
Z601983	LLU-19-8	19	100	27.0	6.5	45.4	1 x 100 m
Z700526	LLU-22-8	22	120	36.0	8.7	61	1 x 50 m