


## A-1328



- Forged alloy steel — Quenched & Tempered.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Each hook has a Product Identification Code (PIC) for material traceability, along with the size and the name Crosby.
- Suitable for use with Grade 100 and Grade 80 chain.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.

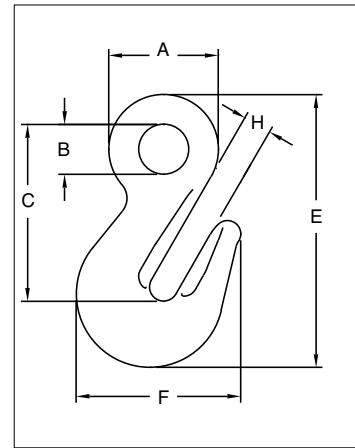

### A-1328 Eye Grab Hook


Chain Size		Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)					
(in)	(mm)				A	B	C	E	F	H
1/4 - 5/16	7 - 8	2.6	1026169	.44	44.5	19.1	70.9	109	66.3	11.2
3/8	10	4	1026187	.73	52.3	23.9	84.6	130	78.5	13.5
1/2	13	6.8	1026196	1.50	65.0	28.4	104	162	97.3	16.8
5/8	16	10.3	1026205	2.72	78.0	33.3	125	194	115	20.0
3/4	19-20	16	1026214	4.54	82.6	38.1	137	223	152	23.9
7/8	22-23	20	1026223	5.94	100	46.0	165	257	166	27.7
1	26	27.1	1026232	8.57	113	50.8	183	291	197	30.2
1 1/4	32	41	1026241	17.9	143	60.5	231	371	241	38.1

4:1 Design Factor.

## A-1348



- Forged alloy steel — Quenched & Tempered.
- The use of A-1348 Cradle Grab Hook will allow 100% percent of the chain sling capacity. When used to hook back to chain leg to form a choker, the angle of the choke must be 120 degrees or greater. When used as a chain shortener, minimize twist of chain and ensure chain is fully engaged in hook.
- Innovative cradle design allows for 100% efficiency of Grade 100 chain.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Each hook has a Product Identification Code (PIC) for material traceability, along with the size and the name Crosby in raised letters.
- Suitable for use with Grade 100 and Grade 80 chain.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.

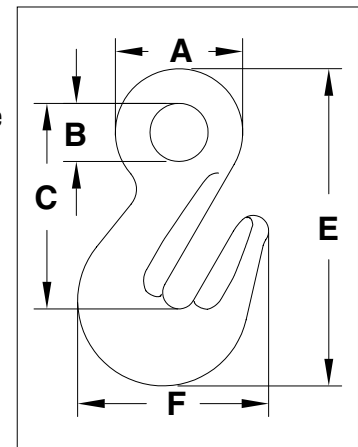

### A-1348 Eye Cradle Grab Hook

Chain Size		Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)				
(in)	(mm)				A	B	C	E	F
1/4-5/16	7-8	2.5	1026200	0.35	36.3	16.5	64.0	98.2	58.2
3/8	10	4.0	1026209	0.64	49.5	26.0	78.0	120	68.8
1/2	13	6.8	1026218	0.87	62.0	29.0	97.0	146	82.4
5/8	16	10.3	1026227	2.83	79.0	36.0	126.5	196	111.8

4:1 Design Factor.