


381-SY



- All single point shank hooks are genuine Crosby, forged alloy steel, Quenched & Tempered, and have the patented QUIC-CHECK® markings.
- Durable and allows longer continuous duty cycle.
- Can be used with magnet and drop ball.
- Single sheave design.
- Dual action hook that swings and rotates.
- Utilizes McKissick® roll-forged sheaves with flame-hardened grooves.
- Furnished standard with bronze bushed sheaves.
- Optional tapered roller bearings.
- Marked in short tons unless metric tag requested at time of order.

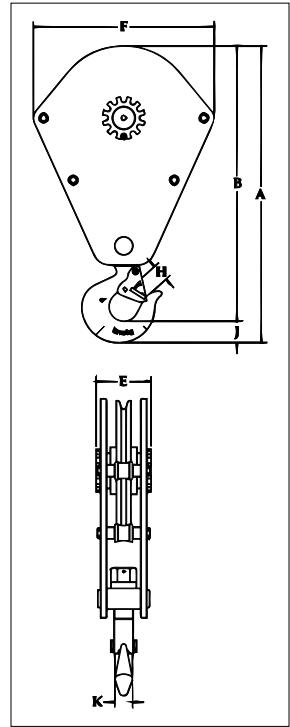

APPLICATION AND WARNING INFORMATION
SECTION 17

381-SY Scrap Handling Blocks

Model No.	Stock No.	Working Load Limit (t)	Sheave Diameter (mm)	Standard Wire Rope Diameters (mm)	Weight Each (kg)	Dimensions (mm)						
						A	B	E	F	H	J	K
S15S16L	2014810	13.5	406	14-22	129	944	868	161	578	70.0	75.5	60.5
S20S18L	2014812	18.0	457	16-25	179	1004	929	174	629	70.0	75.5	60.5
S25S20L	2014814	22.5	508	19-28	209	1071	995	174	679	70.0	75.5	60.5
S30S24L	2014816	27.0	610	22-32	320	1281	1189	199	781	82.5	92.0	76.0
S40S24L	2014818	36.0	610	22-32	370	1418	1289	199	781	86.0	129	82.5

4:1 Design Factor.