





TU-480 Series



- Wide range of sizes available:
 - 27 and 54 metric tons (30 and 60 short Tons) capacity
 - 25mm to 60mm (1" to 2-1/4") wire rope diameter
 - 406mm to 610mm (16" to 24") sheave diameter
 - Larger capacity blocks available
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Marked in short tons unless metric tag requested at time of order.



APPLICATION AND WARNING INFORMATION
SECTION 17

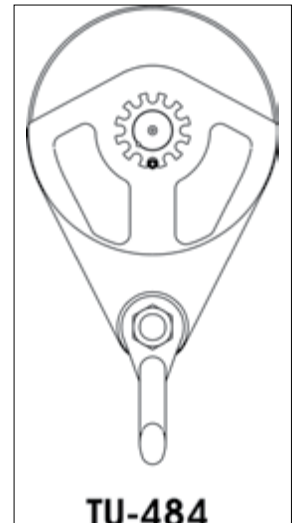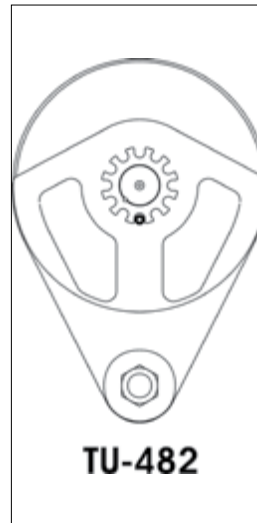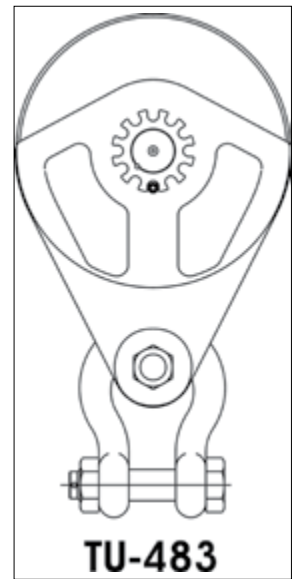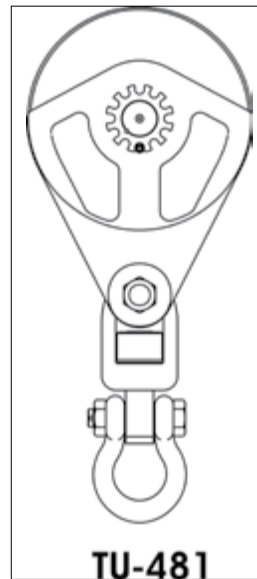

TU-481 / TU-482 / TU-483 / TU-484
High Capacity Snatch Blocks for Tilt-Up Wall Construction

Working Load Limit (t)	Sheave Diameter (mm)	Wire Rope Diameter (mm)	With Swivel Shackle		Tailboard Style		With Upset Shackle		With Fixed Shackle	
			TU-481 Stock No.	TU-481 Weight Each (kg)	TU-482 Stock No.	TU-482 Weight Each (kg)	TU-483 Stock No.	TU-483 Weight Each (kg)	TU-484 Stock No.	TU-484 Weight Each (kg)
27	406	32	2108327	107	2108330	63.5	2108333	81.6	2108651	72.6
27	406	38	2108351	107	2108354	63.5	2108357	81.6	2108657	72.6
27	508	32	2108387	113	2108390	70.3	2108393	88.5	2108666	79.4
54	508	38	2108411	177	2108414	70.3	2108417	88.5	2108672	79.4
54	457	32	2108453	177	2108456	104	2108459	154	2108462	132
54	457	38	2108483	177	2108486	104	2108489	154	2108492	132
54	610	32	2108528	204	2108531	132	2108534	181	2108537	159
54	610	38	2108558	204	2108561	132	2108564	181	2108567	159
54	610	44	2108588	204	2108591	132	2108594	181	2108597	159
54	610	51	2108618	204	2108621	132	2108624	181	2108627	159
54	610	57	2108633	204	2108636	132	2108639	181	2108642	159

4:1 Design Factor.

Contact our Block Hotline 800-772-1555 or visit thecrosbygroup.com/engineeredolutions for more information.