



Egg Link KSS




Stock No.	Model	Chain Diameter (in)	WLL (lb)	Dimensions (in)				Weight (lb)
				A	B	R	S	
Z2780422	KSS7N	0.28	4400	2.76	1.38	3.62	0.51	0.60
Z2780431	KSS10N	0.39	8800	4.02	2.01	5.20	0.73	1.63
Z2780440	KSS13N	0.51	14700	5.39	2.64	6.97	1.02	4.23
Z2780459	KSS16N	0.63	22000	6.77	3.27	8.66	1.22	6.99
Z2780468	KSS19N	0.75	30800	7.99	3.86	10.28	1.46	12.30
Z2780477	KSS23N	0.91	46200	9.37	4.49	12.01	1.57	18.57
Z2780486	KSS26N	1.02	59500	10.75	5.24	13.82	1.81	31.99

Kupler K



Stock No.	Model	Chain Diameter (in)	WLL (lb)	Dimensions (in)			Weight (lb)
				R	W	S	
Z2780495	K7N	0.28	4400	2.36	1.02	0.49	0.33
Z2780501	K10N	0.39	8800	2.87	1.38	0.75	1.04
Z2780510	K13N	0.51	14700	3.74	1.77	0.98	2.23
Z2780529	K16N	0.63	22000	4.65	2.13	1.14	3.66
Z2780538	K19N	0.75	30800	5.28	2.52	1.34	6.13
Z2780547	K23N	0.91	46200	4.76	2.52	1.77	9.39
Z2780556	K26N	1.02	59500	5.51	3.23	1.89	13.89
Z2780574	K32N	1.26	88100	7.01	3.78	2.52	25.31


6

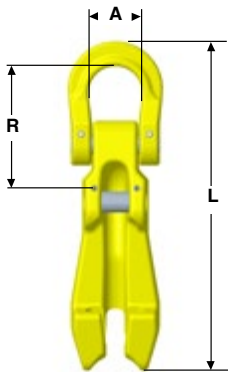

Shortening Clutch KSC N

Unique component for leg length adjustment. It accommodates loads of irregular shape or with a general lack of headroom and allows safe leg length adjustment of any number of legs with the load remaining fully in line.

Stock No.	Model	WLL (lb)	Dimensions (in)			Weight (lb)
			L	R	A	
Z2780716	KSC7N	4400	6.34	2.36	1.02	1.17
Z2780725	KSC10N	8800	8.31	2.87	1.42	2.82
Z2780734	KSC13N	14700	10.71	3.74	1.81	5.95
Z2780743	KSC16N	22000	14.17	4.65	2.20	11.60
Z2780752	KSC19N	30800	16.81	5.28	2.68	21.76



Narrow Jaw Shackle KDN

Narrow jaw shackle for connection from pad eye or similar directly to chain.

Stock No.	Model	WLL (lb)	Dimensions (in)					Weight (lb)
			A	B	C	R	D	
Z2781369	KDN7N	4400	1.42	1.65	0.79	2.24	0.55	0.57
Z2781378	KDN10N	8800	2.09	2.28	1.10	3.27	0.79	1.87
Z2781387	KDN13N	14700	2.83	2.91	1.38	4.17	0.94	3.70
Z2781396	KDN16N	22000	3.27	3.54	1.73	5.00	1.18	6.92