



## A-1361 Single Hook

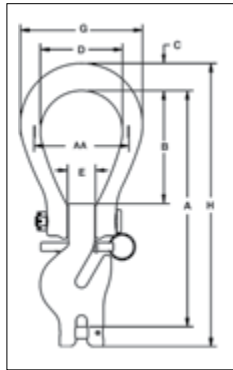

- The Crosby Eliminator® combines selected features and functionality of a master link, connecting link, grab hook and adjuster legs to provide you with one fitting that is suitable for applications that require an adjustable length chain sling.
- Forged alloy steel — Quenched & Tempered.
- Innovative two piece design allows for maximum flexibility.
- Individually Proof Tested with certification.
- The Crosby Eliminator, with a properly installed and locked latch pin, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Suitable for use with Grade 100 and Grade 80 chain.
- Engineered to accommodate optional locking pins that can be inserted to lock the shortened chain legs into place.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- Use the A-1361 and A-1362 in combination to make 3 leg chain slings.
- Load pin assembly instructions available.

## A-1362 Double Hook

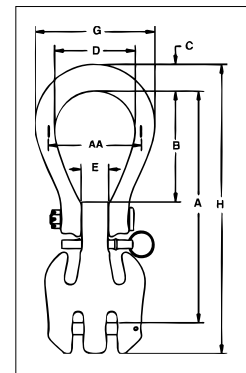

APPLICATION AND WARNING INFORMATION  
SECTION 17



### A-1361 Crosby Eliminator® Single Hook

Chain Size		Frame Size	Working Load Limit (lb)	A-1361 Stock No.	L-1361 Stock No.	Weight Each (lb)	Dimensions (in)								S-4104N Replacement Latch Pin Stock No.
(in)	(mm)						A	B	C	D	E	G	H	AA	
1/4	7	2	4300	1049797	1049802	3.9	8.20	3.88	.90	3.00	.94	4.40	9.78	3.50	1092983
5/16	8	2	5700	1049804	1049809	3.9	8.18	3.88	.90	3.00	.94	4.40	9.78	3.50	1092983
3/8	10	3	8800	1049813	1049818	6.5	10.05	4.81	1.16	3.50	1.13	5.20	12.06	4.00	1092992
1/2	13	4	15000	1049822	1049827	13.5	12.88	6.00	1.63	4.13	1.31	6.39	15.57	5.00	1093001
5/8	16	5	22600	1049831	1049836	24.1	15.26	6.88	1.96	4.75	1.63	7.41	18.58	6.00	1093010

4:1 Design Factor. Proof tested at 2.5 times the Working Load Limit.

### A-1362 Crosby Eliminator® Double Hook

Chain Size		Frame Size	Working Load Limit (lb)	A-1362 Stock No.	L-1362 Stock No.	Weight Each (lb)	Dimensions (in)								S-4104N Replacement Latch Pin Stock No.
(in)	(mm)						A	B	C	D	E	G	H	AA	
1/4	7	2	8600	1049859	1049913	4.7	8.20	3.88	.90	3.00	.94	4.40	10.10	3.50	1092983
5/16	8	2	11400	1049868	1049922	4.7	8.18	3.88	.90	3.00	.94	4.40	10.10	3.50	1092983
3/8	10	3	17600	1049877	1049931	8.1	10.05	4.81	1.16	3.50	1.13	5.20	12.56	4.00	1092992
1/2	13	4	30000	1049886	1049940	17.3	12.88	6.00	1.63	4.13	1.31	6.39	16.25	5.00	1093001
5/8	16	5	45200	1049895	1049949	31.5	15.26	6.88	1.96	4.75	1.63	7.41	19.33	6.00	1093010

4:1 Design Factor. Proof tested at 2.5 times the Working Load Limit.

### Using Crosby ELIMINATOR® in 3 and 4 Leg Slings

Spectrum 10 Chain Size		Master Link A-342 Stock No.	Master Link A-1343 Stock No.	Crosby ELIMINATOR® Single A-1361 Stock No.	Crosby ELIMINATOR® Double A-1362 Stock No.
(in)	(mm)				
1/4	7	1014285	1247096	1049797	1049859
5/16	8	1014319	1247122	1049804	1049868
3/8	10	1014331	1247124	1049813	1049877
1/2	13	1014348	1247151	1049822	1049886
5/8	16	1014365	1247163	1049831	1049895

Use one of either A-342 or A-1343 master link.

Use one of each when making 3-leg sling.

Use two A-1362 fittings when making quad leg sling.